版本 1


TECHNICAL DADA;

1，Manufacture---Shanghai Fengshen Refrigeration Control Co., Ltd
2，Product Name---Flow Switch FSF50P-1A-65
3，Level of Protection---IP65
4，Liquid temperature--- -25°C～+120°C
5，Max. Liquid Pressure---1.50MPa
6，Connection--- 1"-11-1/2NPT
7，Body---SUS304
8，Madium---Water
9, Electrical Dada

Current A \ Voltage V		AC110	AC220
Non-inductive current		16	16
Inductive current	full load	16	8
	starting	96	48

11, Flow Rates


flow m^3/h \ pipe size inch		1	1 1/4	1 1/2	2	2 1/2	3	4	5	6	6
min. flow	Flow increase R to B closes	0.95	1.32	1.70	3.11	4.09	6.24	8.40	12.9	16.8	46.6
	Flow Decrease R to Y closes	0.57	0.84	1.14	2.16	2.84	4.32	6.10	9.30	12.3	38.6
max. flow	Flow increase R to B closes	2.00	3.02	4.36	6.59	7.84	12.0	18.4	26.8	32.7	94.2
	Flow decrease R to Y closes	1.93	2.84	4.09	6.13	7.30	11.4	17.3	25.2	30.7	90.8

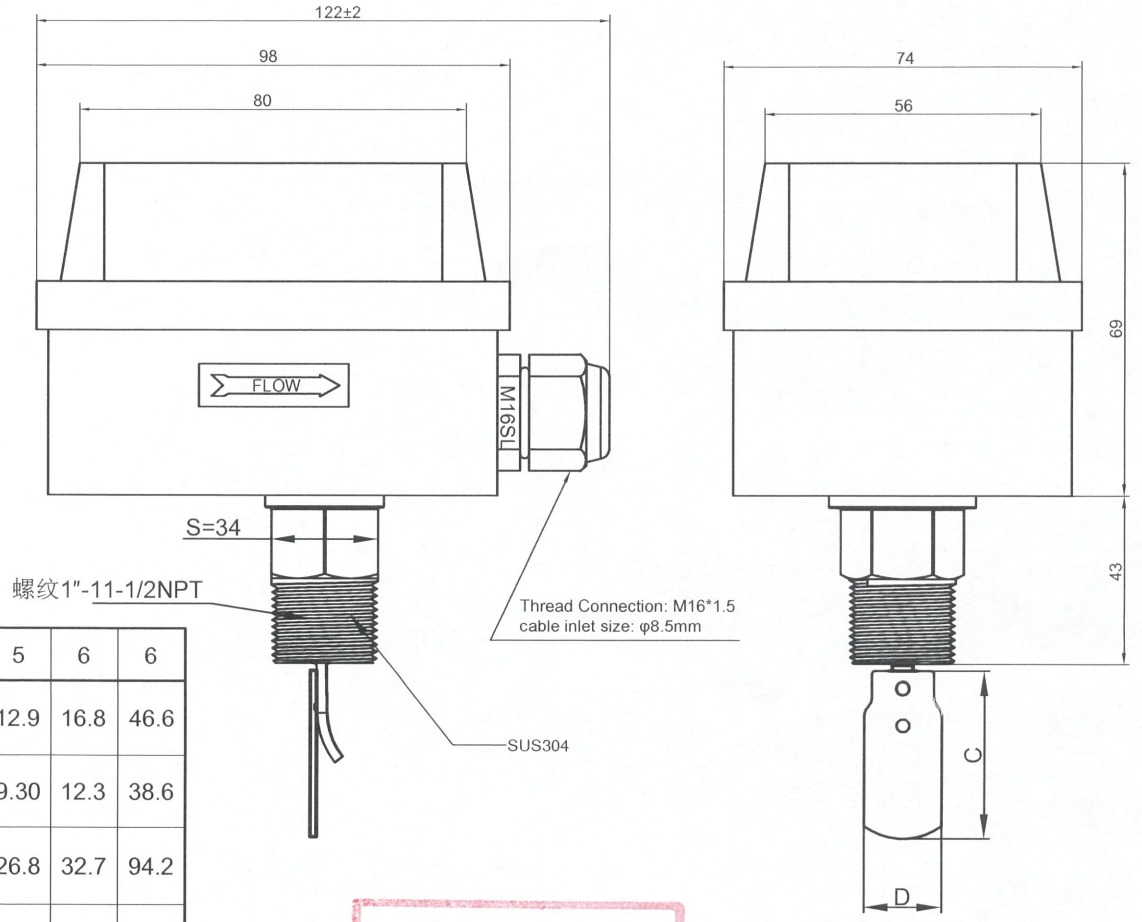

12, Paddle Size

Size (inch)	C	D
1	37	20
2	57	25
3	88	25
6	168	25

13，Contact Form



Action of swith on a decrease in flow above the setpoint

受控文件

标记	处数	更改文件号	签字	日期	FSF50P-1A-65 Flow Switch	图号	FSF50P-1A-65
设计	计明贵		审核	李韵清	Specification Document	代码	
校对			批准	李韵清	图样标记 / 数量 1 / 比例 1:1	材料	
工艺			日期	2024-02-29	共 页 / 第 页	上海奉申制冷控制器股份有限公司	