


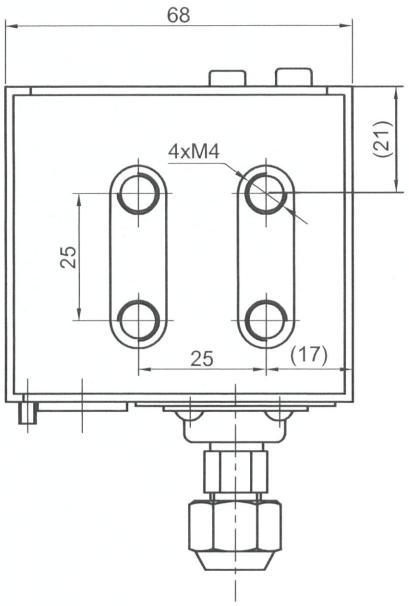


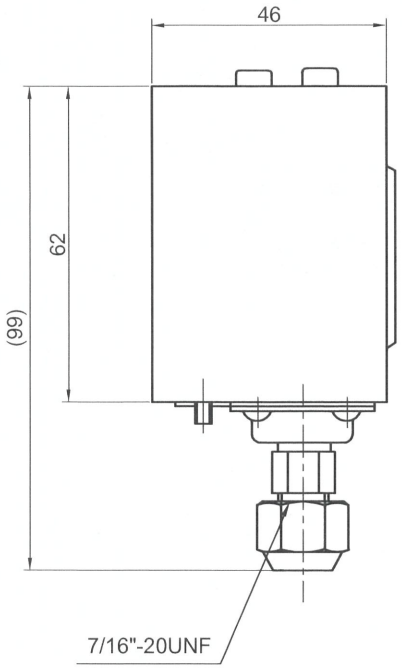


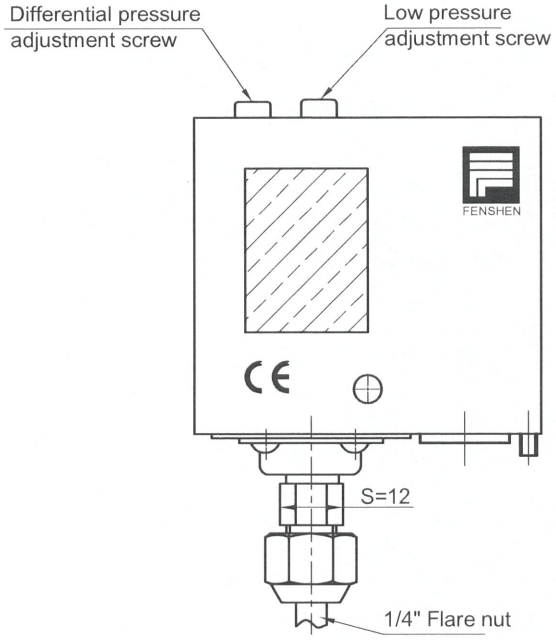

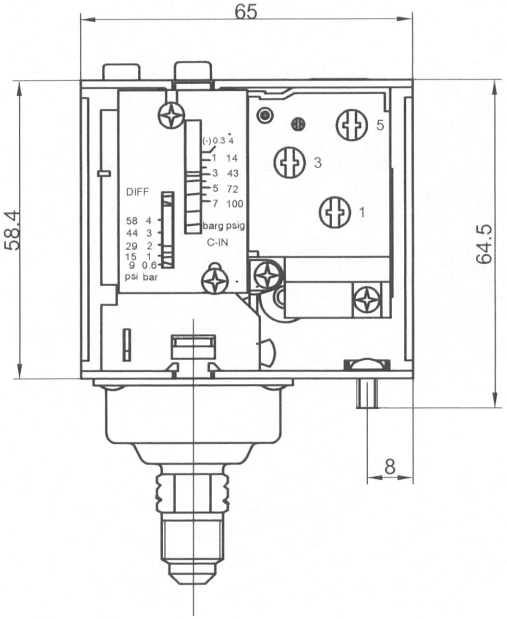

Specifications

- Type: Auto reset
- Differential: Adjustable
- Configuration: Single
- Contact configuration: SPDT
- Rated current: 1-3 (or 1-5): 16(16)A 240Vac
  1-5 (or 1-3): 1(1)A 240Vac
- Degree of protection: IP44 with top cover
  IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40~65℃
  Intended transportation conditions: -40~65℃， 10-90%RH (non condensing situation
- Max refrigerant temperature: 120℃
- Mechanical life：300,000 Times



(1): Common contact
(1)-(3): Cut in pressure rise
(1)-(5): Cut in pressure drop

受控文件

FACTORY SETTING				
MODEL	PRESSURE RANGE [barg]/[psi]	DIFF.RANGE [barg/[psi]	RESET	TEST PRESSURE [barg]/[psi]
PX10E	1~10 /14.5~145	1~3 /14.5~43.5	AUTO	17/246.5

Revision Hystory				
Curr	Prev	Note	Signature	Date
Designer			Date	
Checked				
Verifyed				
Approved				

ADJUSTABLE LOW PRESSURE CONTROLS

PX10E

	Weicht	Ratio
		1:1(A3)
Page1	Total	

FENSHEN