



版权归上海奉申制冷控制器股份有限公司

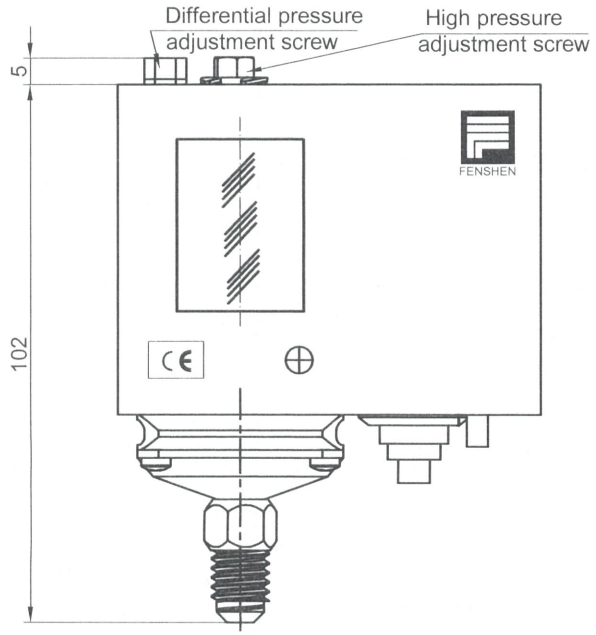

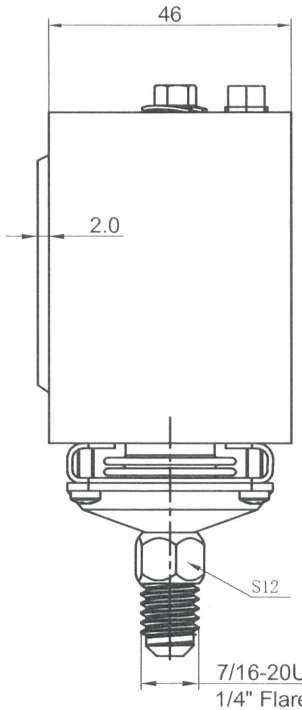


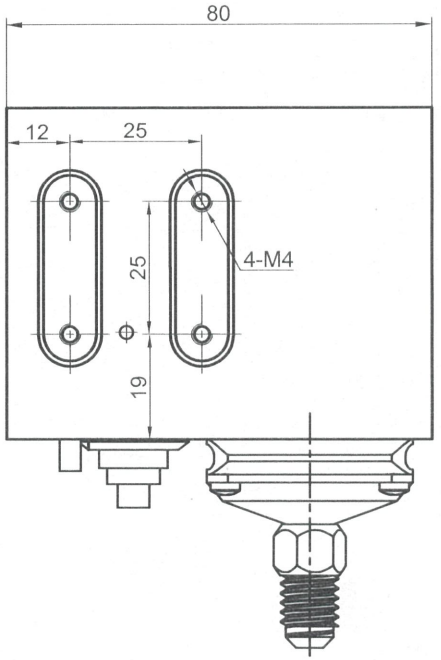



(1): Common contact
(1)-(3): Open on pressure rise
(1)-(5): Open on pressure drop

ELECTRICAL RATING			
Rated Amps./A \ Rated Voltage/V		A.C.110	A.C.220
Non-Inductive Current		24	16
Inductive Current	Full Load (FLA)	24	16
	Locked Rotor (LRA)	144	96

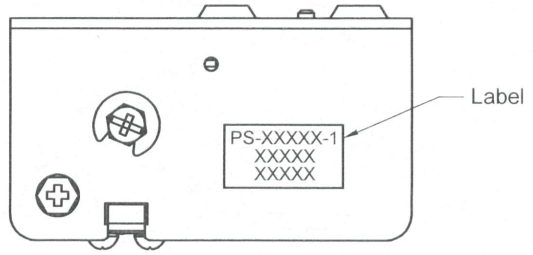

Specifications

- Type: Auto reset
- Differential: Adjustable
- Configuration: Single
- Contact configuration: SPDT
- Degree of protection: IP44 with top cover
  IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40T65℃
  Intended transportation conditions: -40T65℃，≤85%RH (non condensing situation)
- Max refrigerant temperature: 120℃
- Mechanical life:300,000 Times
- PED：complied with Pressure Equipment Directive 2014/68/EU

受控文件

MODEL	PRESSURE RANGE [barg]/[psig]	DIFF.RANGE [bar]/[psi]	FACTORY SETTING					
			CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. [bar]/[psi]	Use terminals	Max.PS [barg]/[psig]	Burst Pressure [barg]/[psig]
PX45DLE-PED	10~45 / 145~653	5~15 / 73~218	42±4.2 / 609±61	37±3.7 / 537±54	5±0.5/ 73±7.3	1-5	50 / 725	140 / 2030

Mark	No.	Changed no.	Sign	Date
Design			Standard	
Check				
Approve			Date	2021.12

Single Pressure Control PX45DLE-PED

Specification

Art. NO. PX45DLE-PED

Code

Material

Marking of drawing	Qty	Scale

Total Page | Page

Shanghai Fengshen Refrigeration Controls.Co,Ltd