



版权归上海奉申制冷控制器股份有限公司

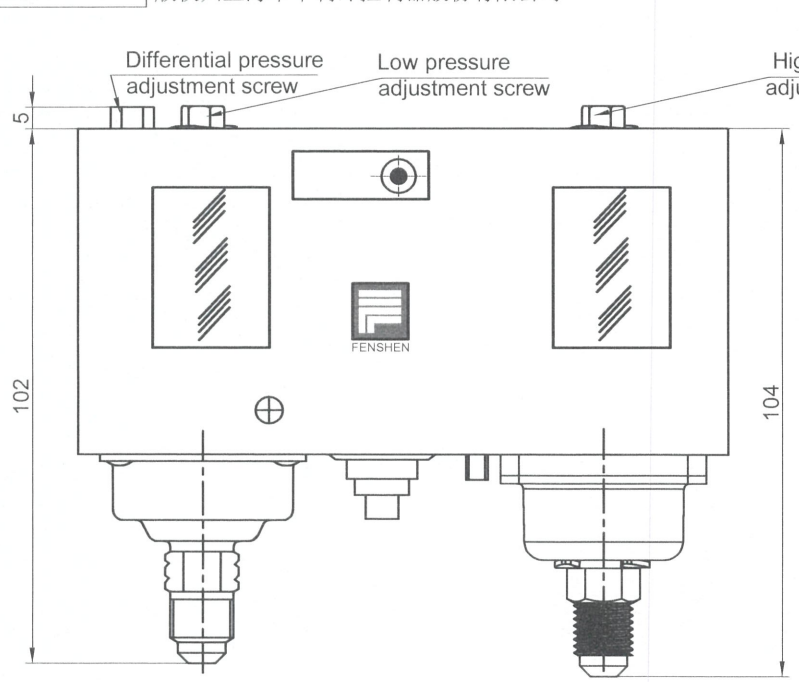


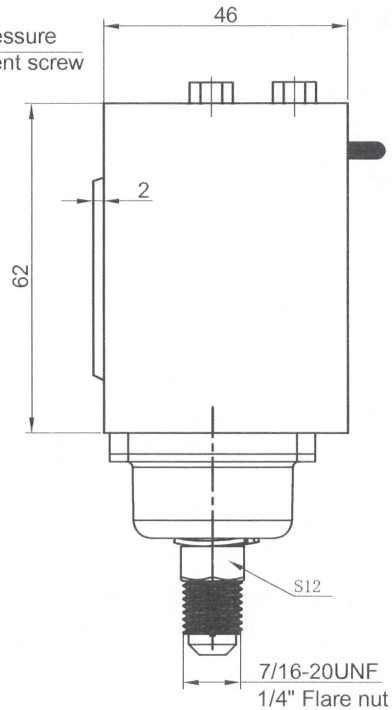

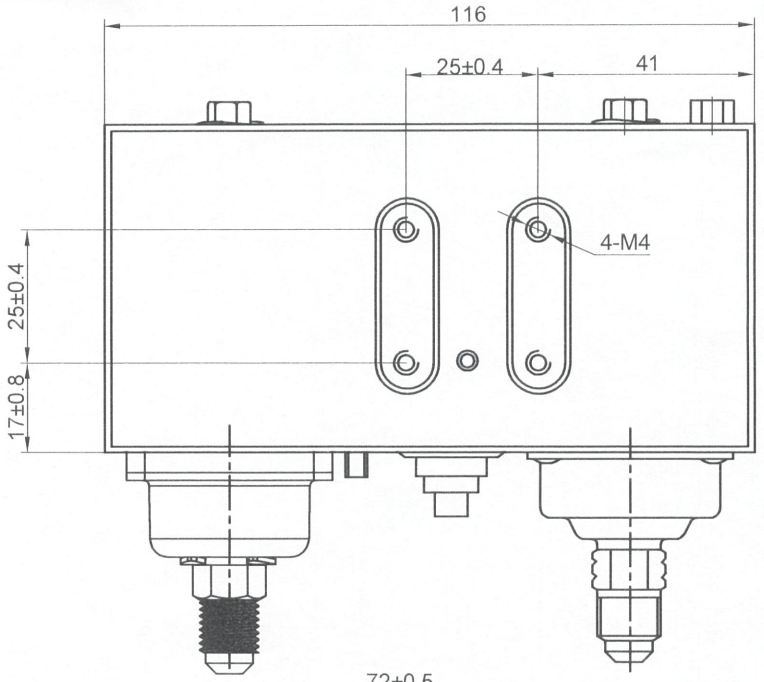

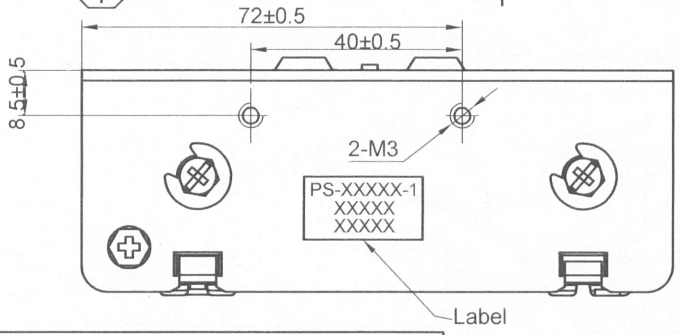

ELECTRICAL RATING			
Rated Amps./A \ Rated Voltage/V		A.C.110	A.C.220
Non-Inductive Current		24	16
Inductive Current	Full Load (FLA)	24	16
	Locked Rotor (LRA)	144	96

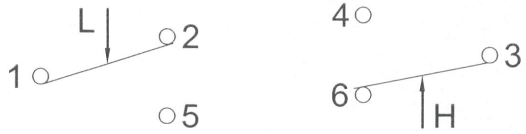

(1): Common contact
(1)-(2): Open on pressure rise
(1)-(5): Open on pressure drop

(3): Common contact
(3)-(4): Open on pressure rise
(3)-(6): Open on pressure drop

Specifications
·Type: auto-manual reset
·Differential: LOW Adjustable & HIGH
Non Adjustable
·Configuration: Dual
·Contact configuration: SPDT
·Degree of protection: IP44 with top cover
IP20 without top cover
·Method of mounting control: Independently mounted
·Ambient working temperature: -40~55℃
Intended transportation conditions: -40~65℃，≤85%RH (non condensing situation)
·Max refrigerant temperature: 120℃
·Mechanical life:LP:300,000 Times；
HP:10, 000 Times
·PED：complied with Pressure Equipment Directive 2014/68/EU

受控文件

MODEL	PRESSURE RANGE [barg]/[psig]	DIFF.RANGE [bar]/[psi]	FACTORY SETTING CUT OUT [barg]/[psig]	CUT IN [barg]/[psig]	DIFF. [bar]/[psi]	Use terminals	Max.PS [barg]/[psig]	Burst Pressure [bar]/[psi]
PX745LHME -PED	10~45 / 145~653	≤8 / ≤116	42±1/ 609±14	≥33 / ≥479	≤8 / ≤116	3-6	50 / 725	200/ 2900
	-0.3~7 / -4~102	0.6~4 / 9~58	2±0.2 / 29±2.9	3±0.3 / 43±4.3	1±0.15 / 14±2.2	1-2	17 / 246	80 / 1160

Mark	No.	Changed no.	Sign	Date
Design			Standard	Rebecca Li
Check				Rebecca Li
Approve			Date	2024-07-04

Single Pressure Control PX745LHME-PED		Art. NO.	PX745LHME-PED
Specification		Code	
Marking of drawing	Qty / Scale	Material	
Total Page	Page	Shanghai Fengshen Refrigeration Controls.Co,Ltd	