



版权归上海奉申制冷控制器股份有限公司

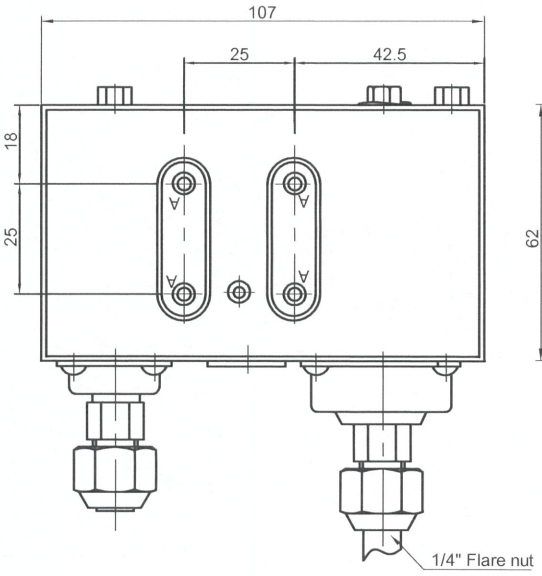

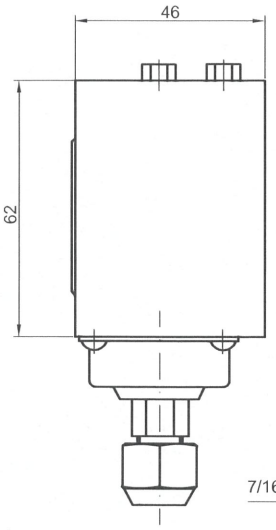

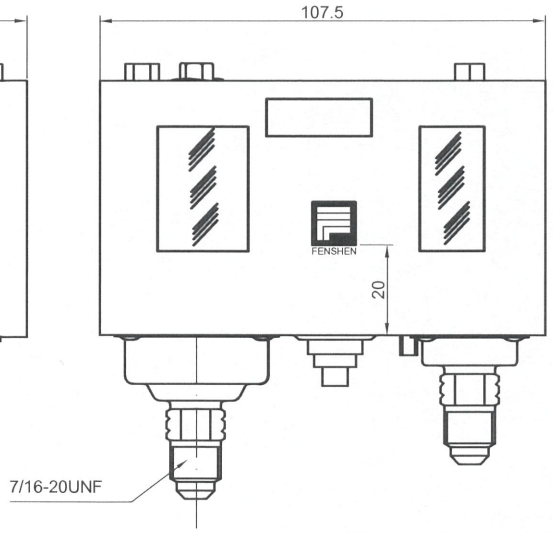


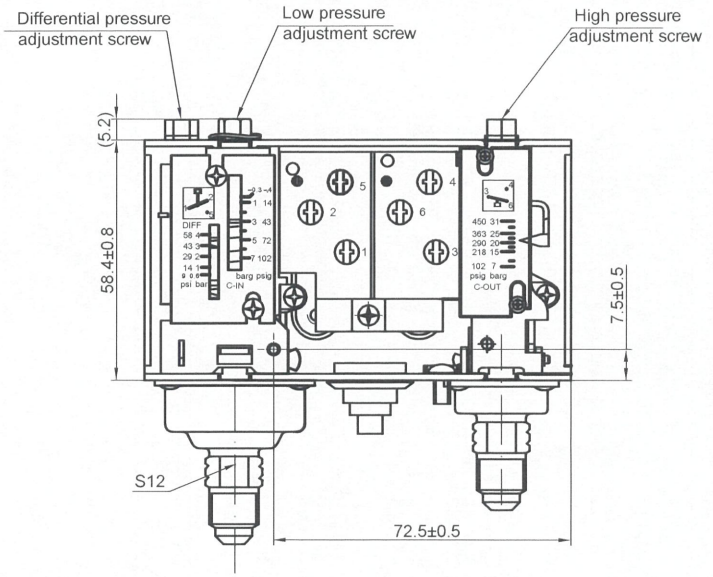


UNIT:MPa

Specifications

- Type: auto-auto reset
- Differential: LOW Adjustable & HIGH Non Adjustable
- Configuration: Dual
- Contact configuration: SPDT
- Degree of protection: IP44 with top cover
  IP20 without top cover
- Method of mounting control: Independently mounted
- Ambient working temperature: -40~55℃
  Intended transportation conditions: -40~65℃，≤85%RH (non condensing situation)
- Max refrigerant temperature: 120℃
- Mechanical life: 300,000 Times



(1): Common contact
(1)-(2): Cut in pressure rise
(1)-(5): Cut in pressure drop



(3): Common contact
(3)-(4): Cut in pressure rise
(3)-(6): Cut in pressure drop

FACTORY SETTING						
MODEL	LOW PRRSSURE		HIGH PRRSSURE		RESET	
	PRESSURE RANGE [barg]/[psig]	DIFF.RANGE [barg]/[psi]	PRESSURE RANGE [barg]/[psig]	DIFF.RANGE [barg]/[psi]	L.P	H.P
PX830E	-0.3~7 /-4~102	0.6~4 /9~58	7~31 /102~450	Fixed≤0.6	AUTO	AUTO

受控文件

ELECTRICAL RATING			
Rated Amps./A \ Rated Voltage/V		A.C.110	A.C.220
Non-Inductive Current		24	16
Inductive Current	Full Load (FLA)	24	16
	Locked Rotor (LRA)	144	96

Mark	No.	Changed no.	Sign	Date	Dual Pressure Control PX830E			Art. NO.	PX830 E
					Specification			Code	
Design			Standard		Marking of drawing	Qty	Scale	Material	
Check									
Approve			Date		Total Page	Page		Shanghai Fengshen Refrigeration Controls.Co,Ltd	